


00-190111

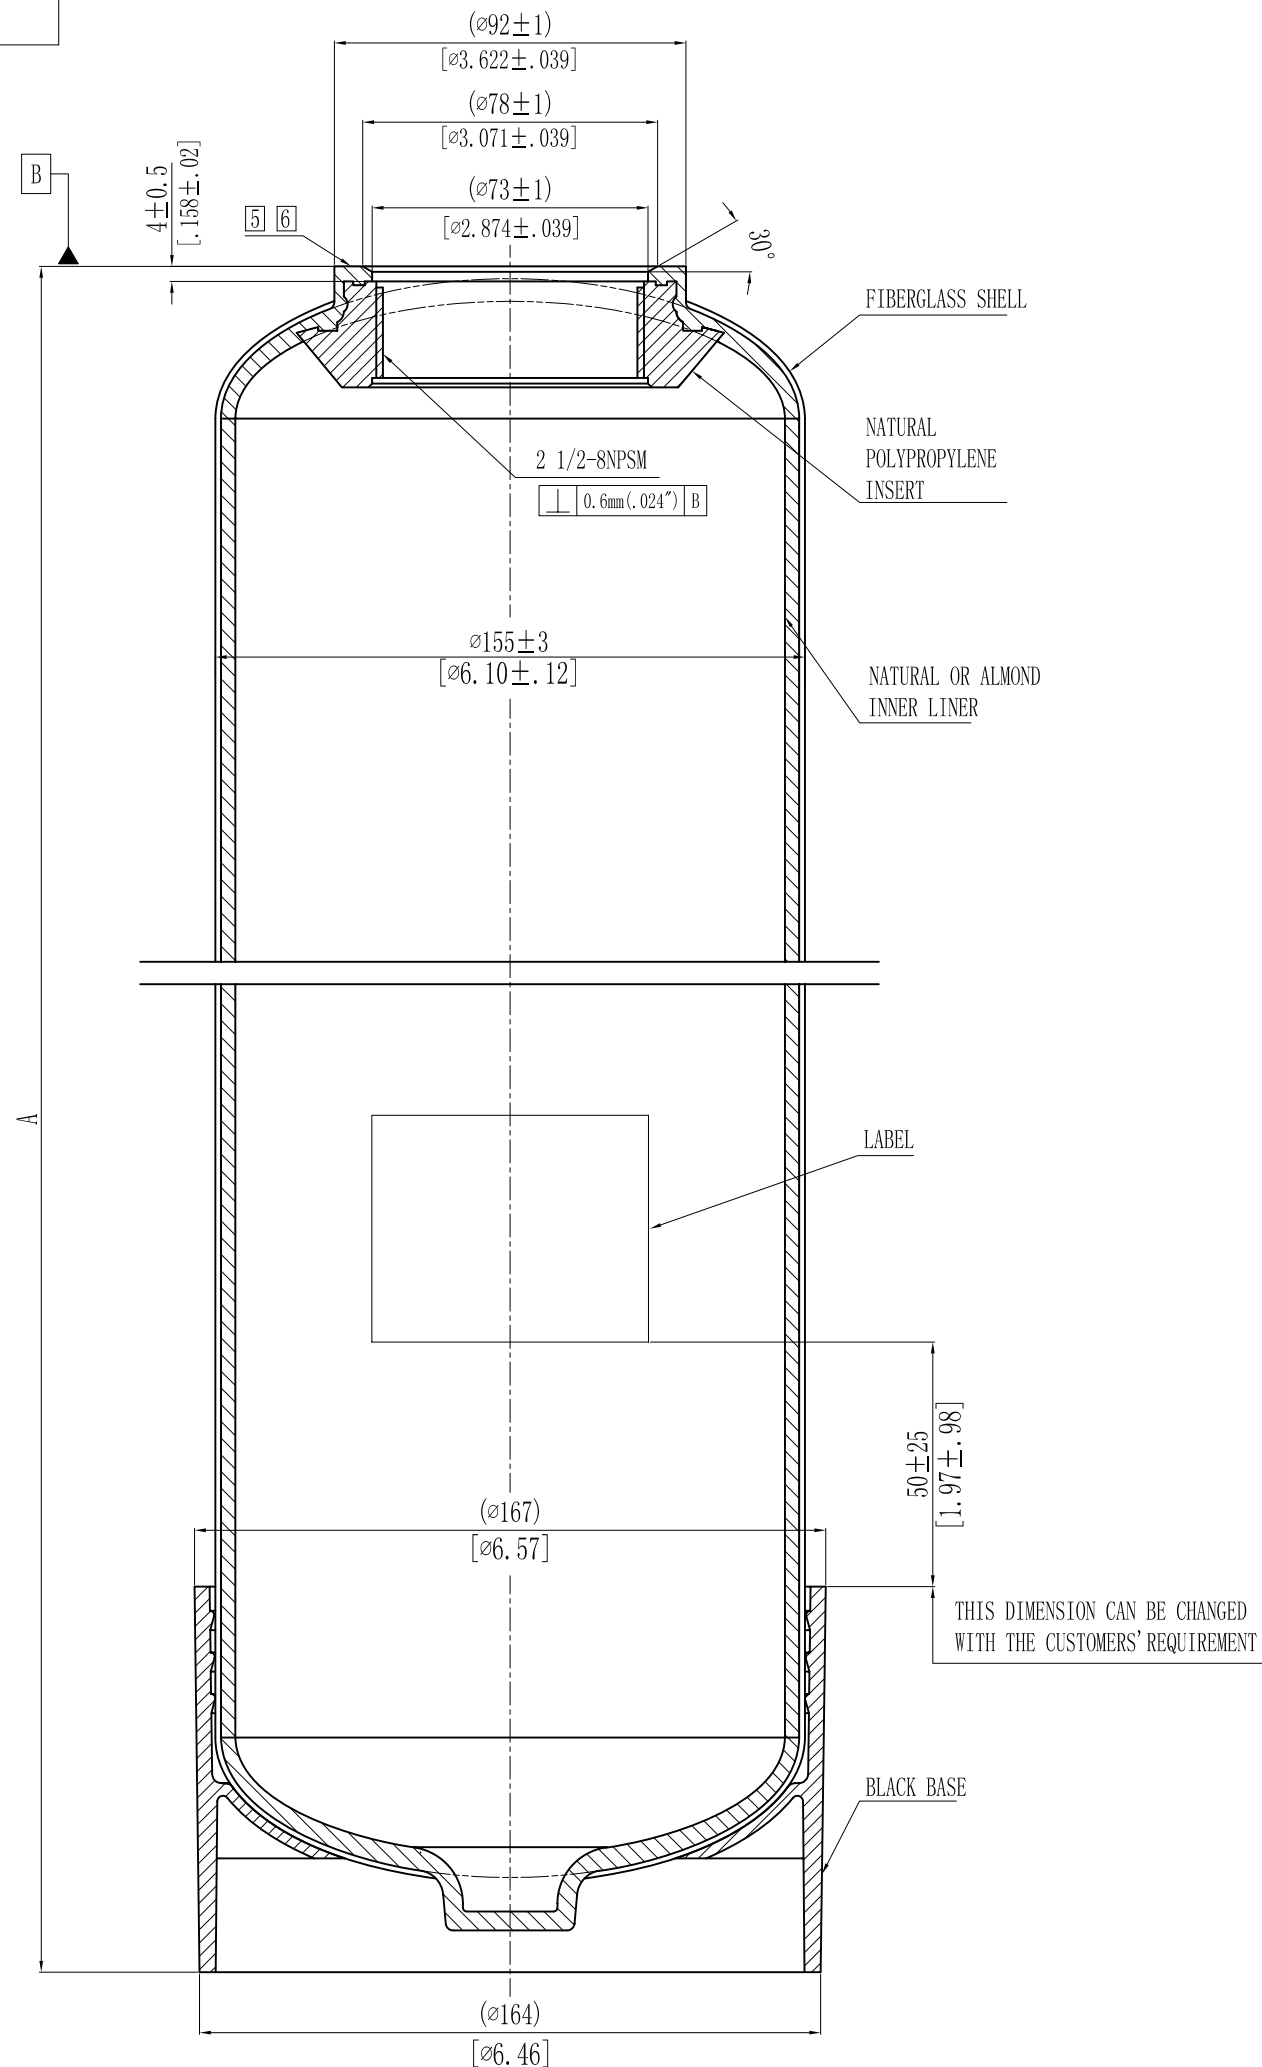

MODEL	A				VOLUME			DOME VOLUME			WEIGHT	
	mm	inch	+/-		liters	U.S.gal	cubic FT	liters	U.S.gal	cubic FT	Kg	LBS
			mm	inch								
6x13	332	13.07	4	.16	4.3	1.14	0.15	0.37	0.10	0.01	1.25	2.75
6x17	434	17.09	4	.16	6.3	1.66	0.22	0.37	0.10	0.01	1.49	3.28
6x35	891	35.08	4	.16	13.7	3.62	0.48	0.37	0.10	0.01	2.75	6.05
6x10	256	10.08	4	.16	3.3	0.87	0.12	0.37	0.10	0.01	1.00	2.20
6x12	307	12.09	4	.16	3.9	1.03	0.14	0.37	0.10	0.01	1.15	2.53
6x18	459	18.07	4	.16	6.7	1.77	0.24	0.37	0.10	0.01	1.55	3.41
6x29	739	29.09	4	.16	11.4	3.01	0.40	0.37	0.10	0.01	2.45	5.39

NOTES:

- TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
- OPERATING SPECIFICATIONS:
 - MAXIMUM WORKING PRESSURE - 150 PSI (10.5BAR)
 - TEMPERATURE RANGE - 34-120° F (1-49°C)
 - MAXIMUM VACUUM - 5"Hg (127mm Hg)
- VISUAL LINER INSPECTION
 - NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3×3mm.
 - NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
- ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
- SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
- SURFACE FINISH.
- DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
- DIMENSIONS IN SQUARE PARENTHESIS ARE INCH UNIT.

3		THIS DRAWING IS UPDATED COMPLYING WITH THE CHINESE VERSION		2008/07/21	
VERSION NO.	DESCRIPTION OF CHANGES:			SIGNATURE	DATE
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):					
SIGNATURE		WAVE CYBER (SHANGHAI) CO., LTD.			
DESIGN	NAME	DATE	SCALE	MATERIAL	MODEL
INSPECTION			1 : 2		DESCRIPTION
APPROVAL			QUANTITY	SMOOTHNESS	6" FRP PRESSURE VESSEL
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.			PROJECTION	COMPUTER CODE	DRAWING NO. 111061-00
			DO NOT MEASURE THE DIMENSIONS.	UNIT: MM	VERSION NO. 3
					TOTAL PAGE: 1