


00-180111

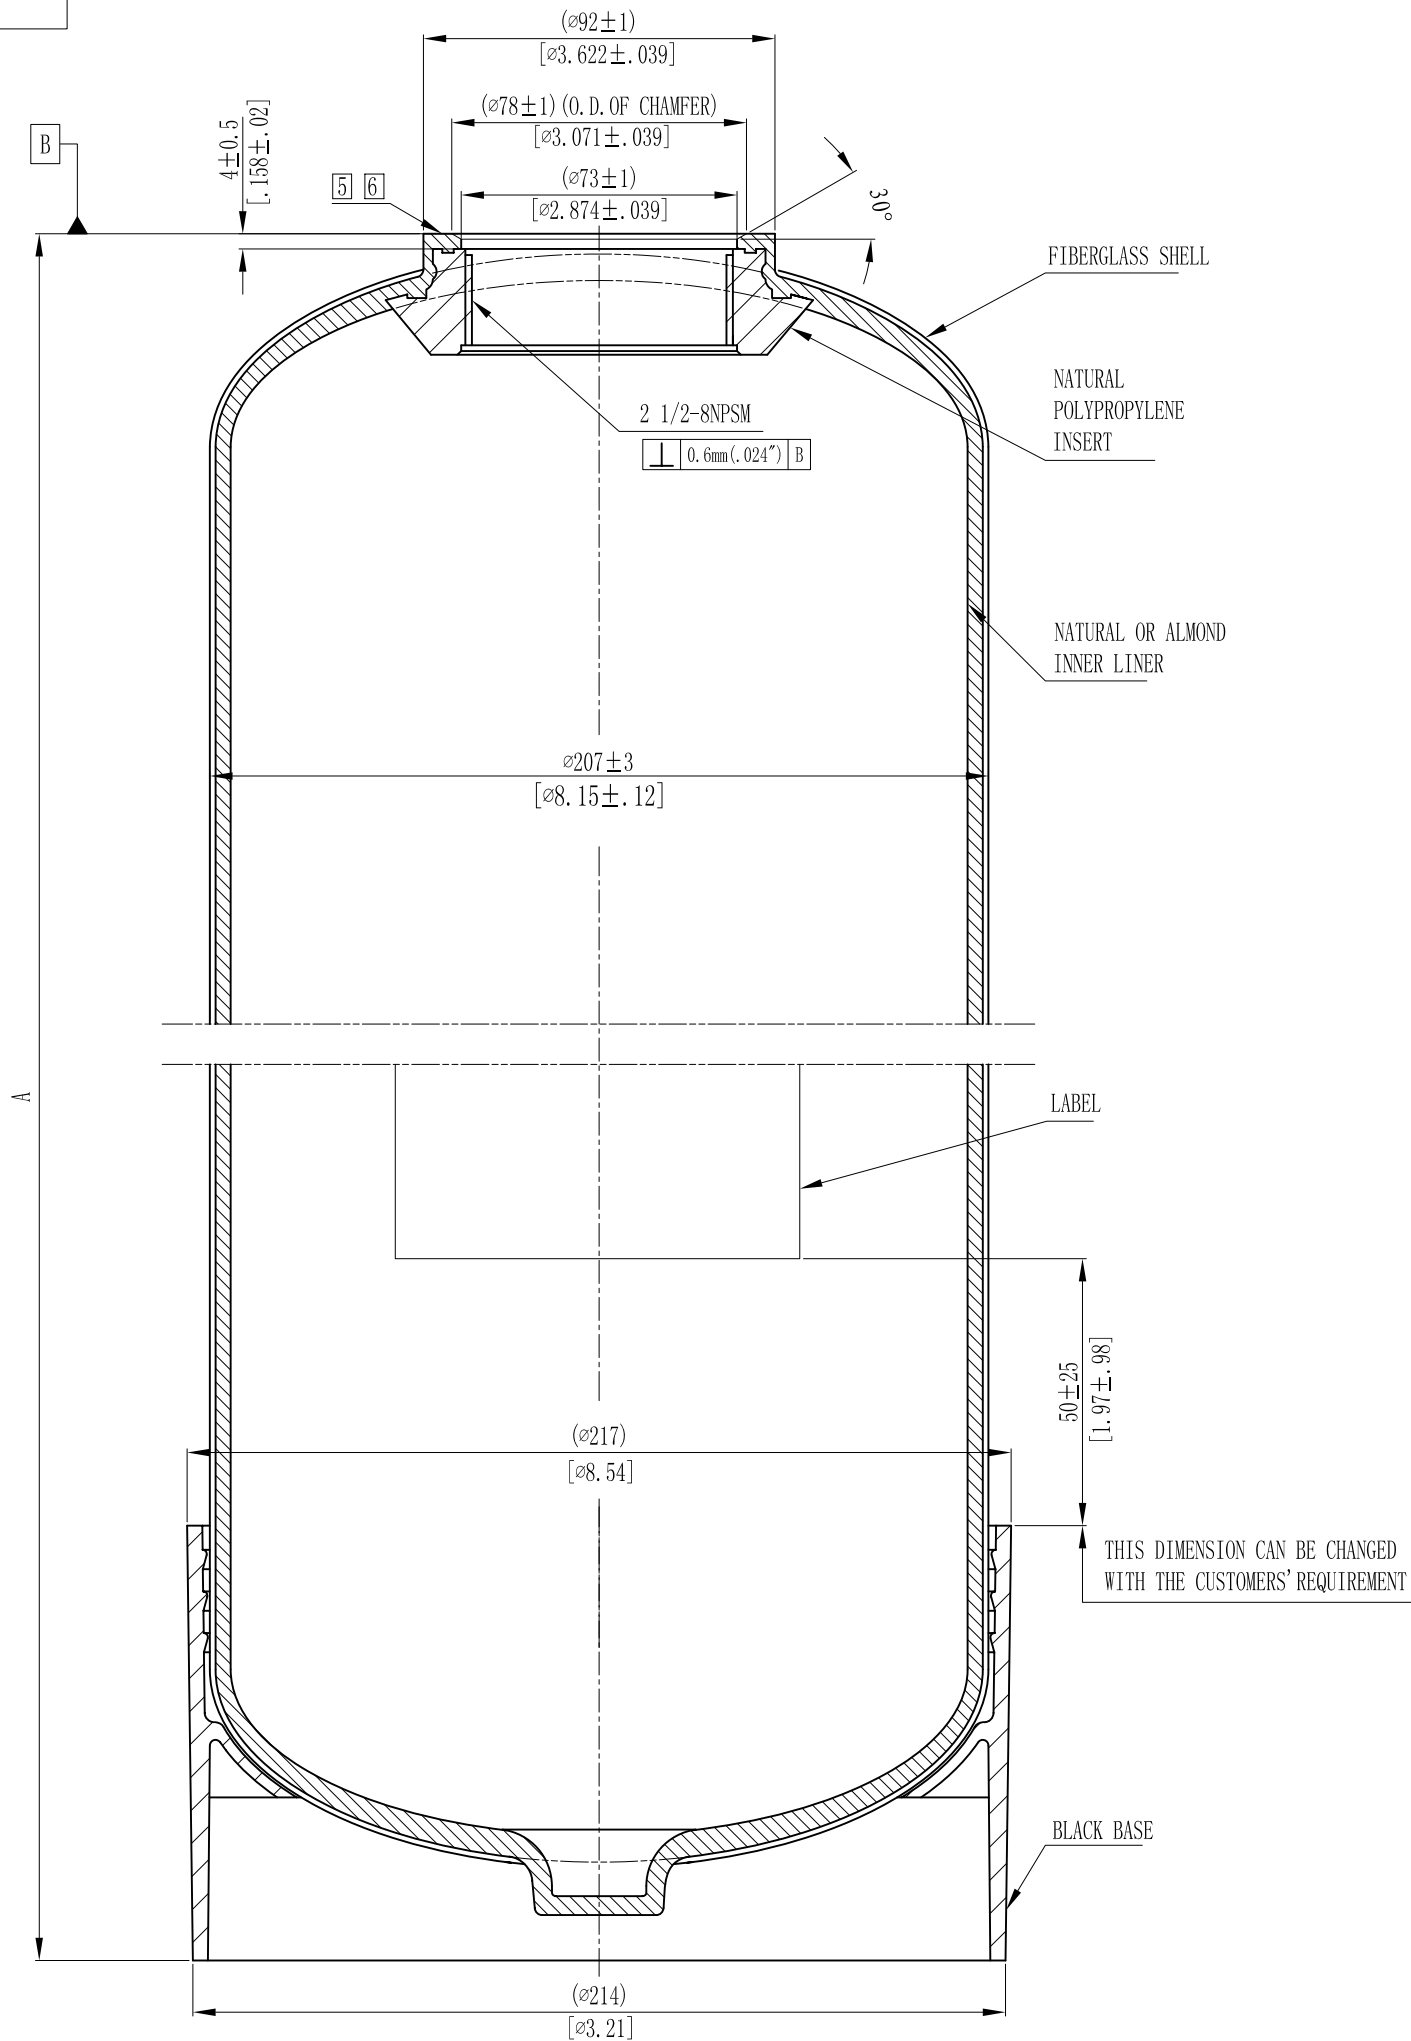

MODEL	A		VOLUME			DOME VOLUME			WEIGHT			
	mm	inch	+/-		Liters	U. S. GAL	CUBIC FT	Liters	U. S. GAL	CUBIC FT	Kg	LBS
			mm	inch								
8x13	335	13.19	4	.16	7.7	2.03	0.27	0.88	0.23	0.03	1.65	3.57
8x17	432	17.01	4	.16	11.0	2.91	0.39	0.88	0.23	0.03	2.00	4.41
8x35	898	35.35	4	.16	24.8	6.55	0.88	0.88	0.23	0.03	4.15	9.15
8x44	1126	44.33	5	.20	32.1	8.48	1.13	0.88	0.23	0.03	4.80	10.58
8x18	459	18.07	4	.16	11.5	3.04	0.41	0.88	0.23	0.03	2.40	5.28
8x24	612	24.09	4	.16	16.6	4.39	0.59	0.88	0.23	0.03	2.88	6.34
8x30	762	30.0	4	.16	21.4	5.65	0.76	0.88	0.23	0.03	3.61	7.95
8x40	1018	40.08	5	.20	29.1	7.69	1.03	0.88	0.23	0.03	4.53	9.98
8x47	1196	47.09	5	.20	34.8	9.19	1.23	0.88	0.23	0.03	5.17	11.37

NOTES:

- TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
- OPERATING SPECIFICATIONS:
  - MAXIMUM WORKING PRESSURE - 150 PSI (10.5 BAR)
  - TEMPERATURE RANGE - 34-120° F (1-49°C)
  - MAXIMUM VACUUM - 5" Hg (127mm Hg)
- VISUAL LINER INSPECTION
  - NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
  - NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3×3mm.
  - NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
- ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
- SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
- SURFACE FINISH.
- DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
- DIMENSIONS IN SQUARE PARENTHESIS ARE INCH UNIT.

5	THIS DRAWING IS UPDATED COMPLYING WITH THE CHINESE VERSION			2008/07/21	
VERSION NO.	DESCRIPTION OF CHANGES:			SIGNATURE	DATE
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):					
SIGNATURE		<b>WAVE CYBER (SHANGHAI) CO., LTD.</b>			
DESIGN	NAME				
INSPECTION			1 : 2		MODEL
APPROVAL			QUANTITY	SMOOTHNESS	DESCRIPTION
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.			PROJECTION	COMPUTER CODE	DRAWING NO.
			DO NOT MEASURE THE DIMENSIONS.		111081-00
			UNIT: MM	TOTAL PAGE: 1	