


00-EG011

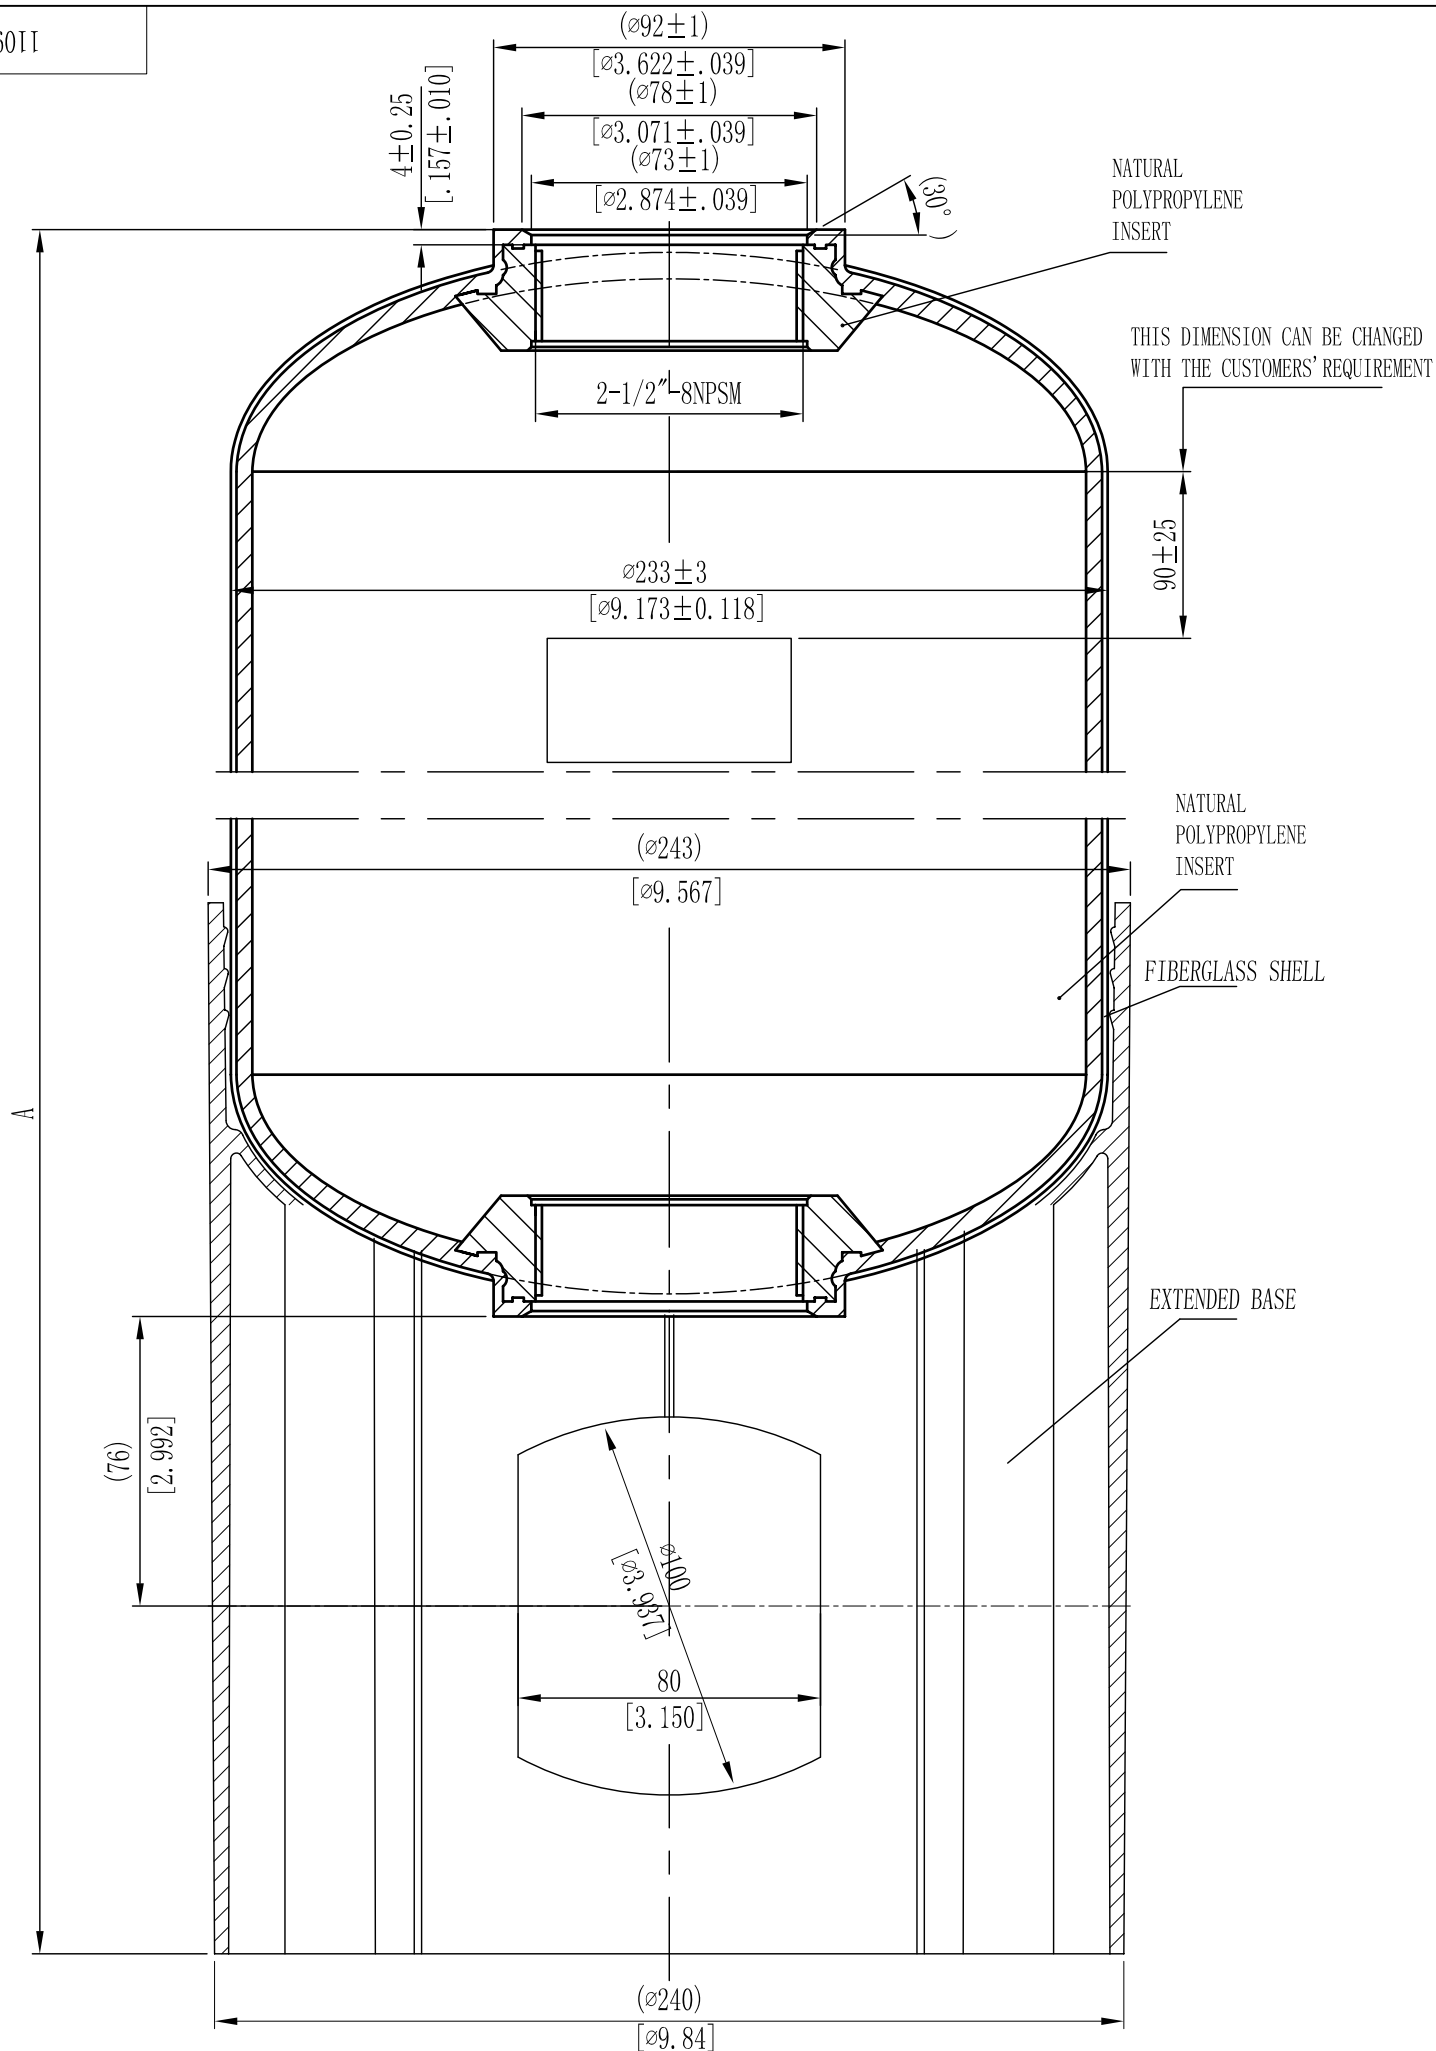

MODEL	A		VOLUME			DOME VOLUME			WEIGHT			
	mm	inch	+/-		Liters	U.S. GAL	CUBIC FT	Liters	U.S. GAL	CUBIC FT	Kg	LBS
			mm	inch								
9×17	578	22.76	4	.16	13.7L	3.62	0.48	1.30	0.34	0.05	2.40	5.28
9×35	1043	41.06	4	.16	31.6L	8.35	1.12	1.30	0.34	0.05	4.35	9.57
9×42	1221	48.07	5	.20	38.2L	10.09	1.35	1.30	0.34	0.05	5.20	11.44
9×48	1375	54.13	5	.20	44.6L	11.78	1.58	1.30	0.34	0.05	6.20	13.64
9×18	606	23.86	5	.20	14.7L	3.88	0.52	1.30	0.34	0.05	2.57	5.65
9×40	1165	45.87	5	.20	36.3L	9.59	1.28	1.30	0.34	0.05	4.99	10.98
9×24	757	29.80	5	.20	20.4L	5.39	0.72	1.30	0.34	0.05	3.21	7.06

NOTES:

- TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
- OPERATING SPECIFICATIONS:
 - MAXIMUM WORKING PRESSURE - 150 PSI (10.5BAR)
 - TEMPERATURE RANGE - 34-120° F (1-49°C)
 - MAXIMUM VACUUM - 5"Hg (127mm Hg)
- VISUAL LINER INSPECTION
 - NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3×3mm.
 - NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
- ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
- SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
- DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
- DIMENSIONS IN SQUARE PARENTHESIS ARE INCH UNIT.

1	THIS DRAWING IS UPDATED COMPLYING WITH THE CHINESE VERSION				2009/06/11
VERSION NO.	DESCRIPTION OF CHANGES:			SIGNATURE	DATE
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):					
SIGNATURE		WAVE CYBER (SHANGHAI) CO., LTD.			
DESIGN	NAME				
INSPECTION			1 : 2		MODEL
APPROVAL			QUANTITY	SMOOTHNESS	DESCRIPTION
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.			PROJECTION	COMPUTER CODE	DRAWING NO.
					111093-00
			DO NOT MEASURE THE DIMENSIONS.	UNIT: MM	TOTAL PAGE: 1