


DETAIL A

MODEL	A (mm)	B (mm)	C (mm)	VOLUME	WEIGHT (kg)	AREA (INSIDE)
18×65	2057±15	1332	932	257	35	2.46 m ²

NOTE:

1. TEST METHOD FOR VESSEL PERFORMANCE COMPLIES WITH NSF/ANSI44-2002 "NSF INTERNATIONAL STANDARD/AMERICAN NATIONAL STANDARD"
2. MAXIMUM WORKING PRESSURE:10.5Bar, WATER MEDIUM TEMPERATURE RANGE: 1°C-49°C; NOT APPLICABLE TO CORROSIVE LIQUID;
3. DIMENSIONAL TOLERANCE: SJ1372-78, GRADE 8.
4. TANK IS SUPPLIED WITH ADAPTOR:

2" NPT MALE ADAPTOR / 1½" SOCKET ADAPTOR
 2" BSP MALE ADAPTOR / 50MM SOCKET ADAPTOR

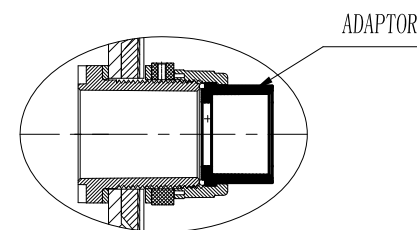

VERSION NO.	DESCRIPTION OF CHANGES:			SIGNATURE	DATE
	REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):				
	SIGNATURE			WAVE CYBER (SHANGHAI) CO., LTD.	
	NAME	DATE			
DESIGN			SCALE	MATERIAL	MODEL
INSPECTION					DESCRIPTION
APPROVAL			QUANTITY	WEIGHT	18" VESSEL(4"×4") (Threaded Side Inlets)
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.			PROJECTION	COMPUTER CODE	DRAWING NO.
					114182-00
			DO NOT MEASURE THE DIMENSIONS.	UNIT: MM	TOTAL PAGE: 1